

Keysight Technologies

# N8805A USB 3.0 Protocol Triggering and Decode for Infiniium 90000 Series Oscilloscopes

Data Sheet



## Easily debug and test designs that include USB 3.0 protocols using your Infiniium 90000 scope

Serial bus interfaces such as USB (universal serial bus) interfaces are widely used today in electronic designs. In many designs, USB buses can provide a content-rich point for debug and test. However, since USB protocols transfer bits serially, using a traditional oscilloscope has limitations. Manually converting captured 1's and 0's to protocol requires significant effort, can't be done in real-time, and includes potential for human error. In addition, traditional scope triggers are not sufficient for specifying protocol-level conditions.


Extend your scope capability with the Keysight Technologies, Inc. USB 3.0 triggering and decode application. This application makes it easy to debug and test designs that include USB 3.0 protocols using your Infiniium 90000 scope.

- Set up your scope to show USB 3.0 protocol decode in less than 30 seconds.
- Get access to a rich set of integrated software-based protocol-level triggers.
- Save time and eliminate errors by viewing packets at the protocol level.
- Time-correlated views to quickly troubleshoot serial protocol problems back to their timing or signal integrity root cause.

Setup	Trigger	Measure	Analyze	Util
1	Channel 1...		Ctrl+1	
2	Channel 2...		Ctrl+2	
3	Channel 3...		Ctrl+3	
4	Channel 4...		Ctrl+4	
	Probes...		Alt+P	
	Serial Decode...		Alt+S	
	Serial Search...			

### Easy to find

Turn decode on/off in the "Setup" menu. View decode embedded on the waveform display or in the protocol viewer listing window. (See pages 4-5).

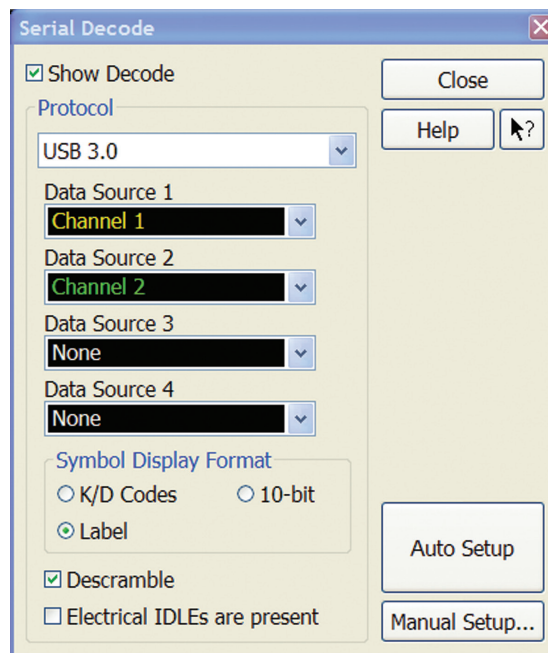


### 30 Second USB 3.0 Setup

Configure your oscilloscope to display protocol decode in under 30 seconds. Use "Auto Setup" to automatically configure sample rate, memory depth and threshold and trigger levels.

# USB 3.0 protocol triggering and searching


Get access to a rich set of integrated protocol level triggers. The application includes a suite of configurable protocol-level trigger conditions specific to USB 3.0. The application uses software-based search triggering when serial triggering is selected.

With software-based protocol triggering, the oscilloscope takes signals acquired using scope channels and reconstructs protocol frames after each acquisition. It then inspects these protocol frames against specified protocol-level trigger conditions and triggers when the condition is met.

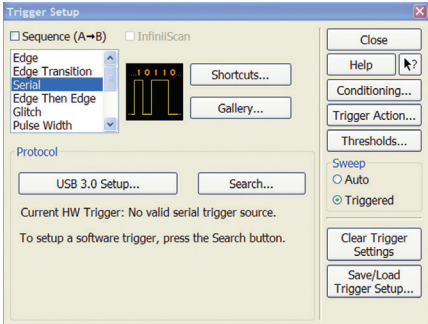


## USB Trigger Setup

Quickly access protocol triggering via the scope's trigger menu.

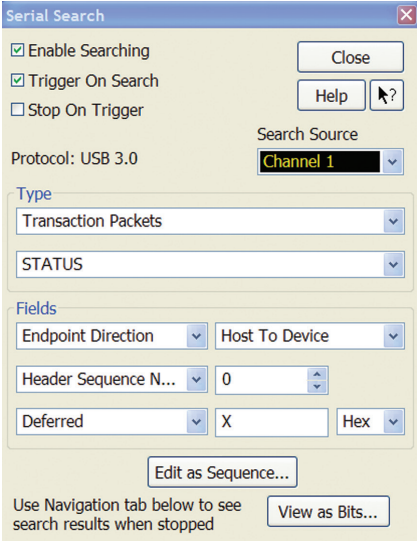


## USB Trigger Setup

Choose triggers from a broad range of USB 3.0 protocol, including ordered sets, link commands, data packets, symbol sequence and errors.

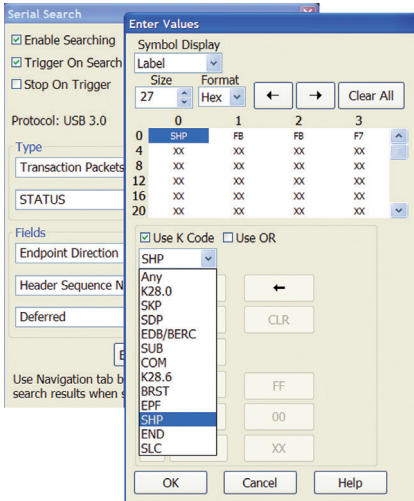


## Payload editor

Use the payload editor to specify data values word by word.

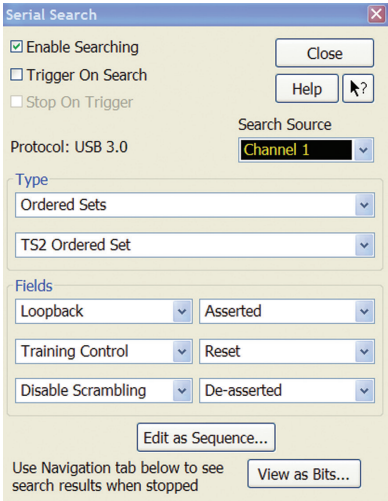

## Post-acquisition searching

Search acquired protocol listings using a menu that is identical to the trigger menu.

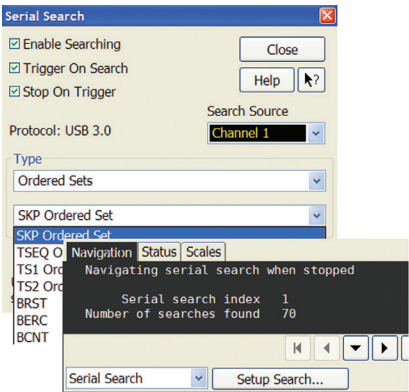



## Quickly find occurrences

Quickly move to next occurrence of a specified event.

## USB 3.0 super-speed protocol decode


### USB 3.0 Super-Speed protocol decode with precise time-correlation between waveforms and listing

Keysight's multi-tab protocol viewer includes correlation between the waveforms and the selected packet. The selected packet, highlighted blue row in the listing, is time-correlated with the blue line in the waveform display. Move the blue tracking marker in time through waveforms and the blue bar will automatically track in the packets window. Or, scroll through the packet viewer and highlight a specific packet. The time-correlation tracking marker will move to the associated point in the waveform.

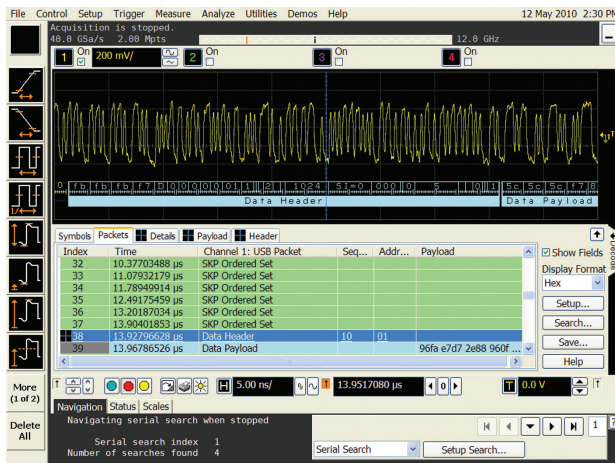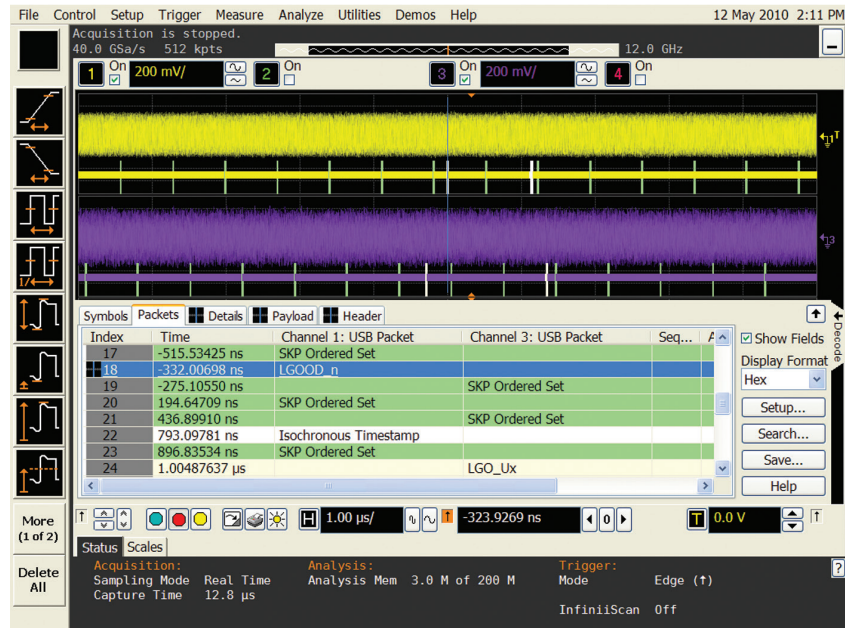

### USB 3.0 decode embedded in waveform area

Utilize the oscilloscope waveform area to display decode information. For USB, minor ticks indicate clock transitions and major ticks show the beginning and end of each word in the serial packet.

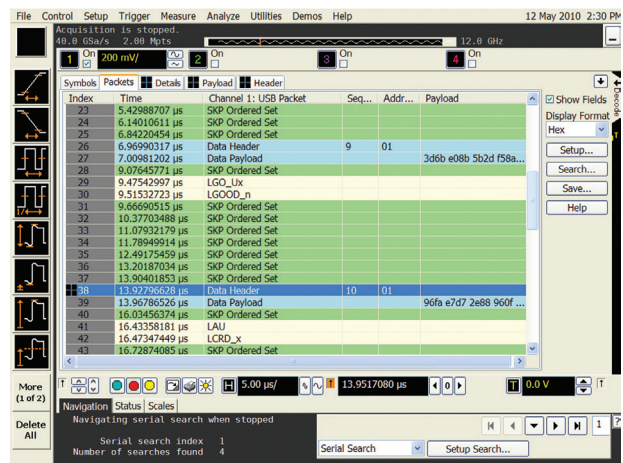


### Full screen USB 3.0 listing

Fill the entire display with compact protocol information using the full screen listing. The protocol viewer window shows the index number, time stamp value, and data content for each serial packet in the list. Scroll through all decoded serial packets to find events of interest or errors in the transmission. Data in the listing window can be saved to a .csv or .txt file for off-line analysis or documentation.



## USB high-speed protocol decode

Quickly move between physical and USB 3.0 Super-Speed protocol layer information using the time-correlated tracing marker. Display protocol content using embedded decode in the waveform area. Or, see protocol events in a compact listing format using the industry's first scope based multi-tab protocol viewer. For minor tick marks indicate clock transitions. Major tick marks indicate sections of the USB 3.0 serial packet.

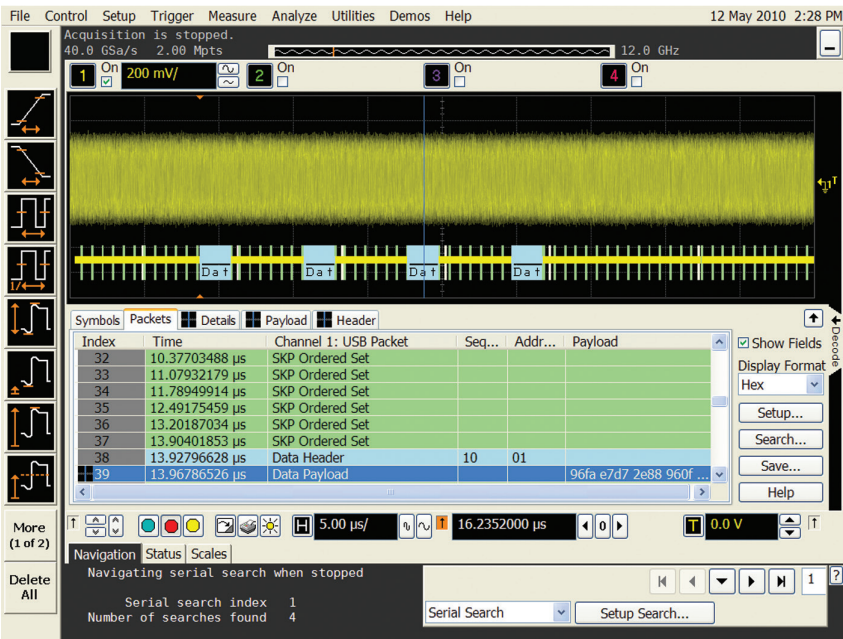

Symbols	Packets	Details	Payload	Header
Generated Fields				
Packet Length = 8288 Decimal				
USB 3.0 packet on 'Channel 1' listing index 39				
Data				
SDP = 5c Hex				
SDP = 5c Hex				
SDP = 5c Hex				
EPF = f7 Hex				
Payload = 96fa e7d7 2e88 960f 14e0 d330 12ea 4dd7 3				
CRC-32 = 1655 4323 (GOOD)				
END = fd Hex				
END = fd Hex				
EPF = f7 Hex				

Details tab breaks the packets into easy-to-read textual fields. Hovering shows additional detail.

Symbols	Packets	Details	Payload	Header
0000: 96 FA E7 D7 2E 88 96 0F 14 E0 D3 30 12 EA				
0010: 31 9F 5C 03 D3 61 FF C7 0F 42 AE 21 8B DD				
0020: 94 A6 77 1F 89 5B 0F C7 E0 8D 24 1D CF A8				
0030: BC F0 4D 6A 6D B4 1C 38 45 9F D2 ED B4 F8				
0040: 60 2E C9 71 6B 1D 04 4D 55 C1 A9 DB 33 60				
0050: 4F 31 F9 FA 40 C5 FB B8 72 E9 B9 89 03 FB				
0060: 7F D3 A2 6A 83 16 0D 0B 5D F1 A7 41 6D 2C				
0070: D1 8F DC 7D 5A BC DB 28 38 B8 9E 66 DB 74				
0080: 3B 38 1B 3A 3C F9 22 36 4C 74 B2 2F FB 54				
0090: 5D 39 0C 03 EA 45 63 E5 6D 35 3F 63 89 DD				
00A0: 6D BC 21 ED A4 F5 BB D5 27 85 53 D4 40 F6				
00B0: 1F D1 71 BE CE 86 7E B3 A0 BC B4 1A C4 CE				
00C0: BC AB 7C 2C 89 BF 43 F1 60 E3 28 5C F8 53				
00D0: 7E A9 F0 D2 0E 27 5C BA B2 26 4E ED 6A A5				
00E0: FC 86 D8 3B 6E 30 EB E4 B2 ED 75 EC A9 5C				
00F0: 9A 7C 1F 7C 16 BB 3F 36 B7 97 6B 50 E9 7B				

Payload tab shows data carried by the packet in byte-by-byte HEX and ASCII.

Symbols	Packets	Details	Payload	Header
Byte 983				Payload[7839:7808]
Byte 987				Payload[7871:7840]
Byte 991				Payload[7903:7872]
Byte 995				Payload[7935:7904]
Byte 999				Payload[7967:7936]
Byte 1003				Payload[7999:7968]
Byte 1007				Payload[8031:8000]
Byte 1011				Payload[8063:8032]

Header tab shows packets in a data book format. Hovering at any field reveals additional detail.

## USB 3.0 specifications and characteristics

USB 3.0 supported speeds	Super-Speed (5 Gb/s)
Probing	Differential required for USB 3.0 active traffic
Auto Setup	Automatically configures trigger levels, measurement thresholds, Volts/div, vertical offset, memory depth, sample rate, trigger and holdoff for proper decode and triggering


## Ordering information

This application is compatible with all 90000 and 90000 X Series oscilloscope models with bandwidth of 6 GHz or more.

Software applications	User-installed node-locked license
USB 3.0 triggering and decode	License N8805A

## Related literature

Publication title	Publication type	Publication number
<i>Infiniium 90000 Series Oscilloscopes</i>	Data sheet	5989-7819EN
<i>USB 3.0 Compliance Test Software for Infiniium Oscilloscopes</i>	Data sheet	5990-4115EN
<i>Infiniium 9000 X-Series oscilloscope</i>	Data sheet	5990-5271EN

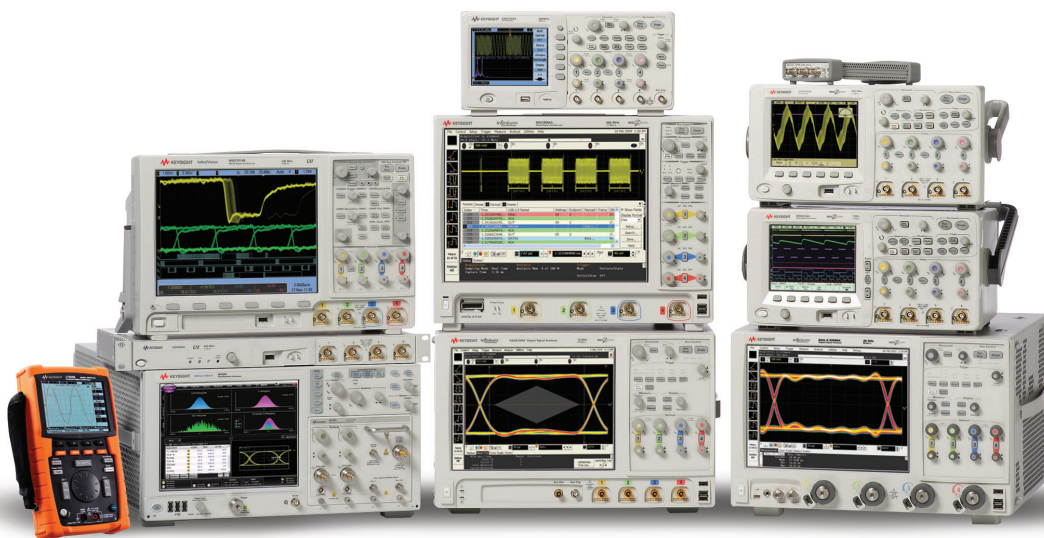


## Keysight Oscilloscopes

Multiple form factors from 20 MHz to >90 GHz | Industry leading specs | Powerful applications

## Evolving Since 1939

Our unique combination of hardware, software, services, and people can help you reach your next breakthrough. We are unlocking the future of technology.

From Hewlett-Packard to Agilent to Keysight.

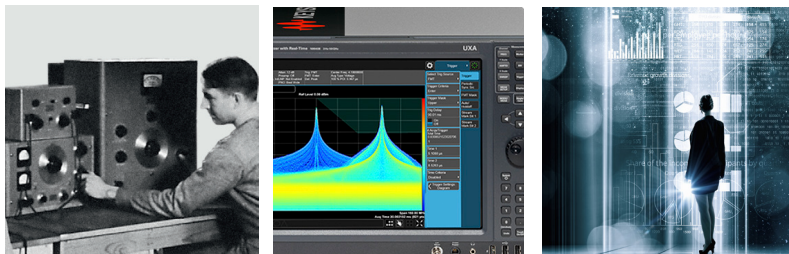

### myKeysight

myKeysight

[www.keysight.com/find/mykeysight](http://www.keysight.com/find/mykeysight)

A personalized view into the information most relevant to you.

[www.keysight.com/find/emt\\_product\\_registration](http://www.keysight.com/find/emt_product_registration)

Register your products to get up-to-date product information and find warranty information.

### KEYSIGHT SERVICES

Accelerate Technology Adoption.  
Lower costs.

Keysight Services

[www.keysight.com/find/service](http://www.keysight.com/find/service)

Keysight Services can help from acquisition to renewal across your instrument's lifecycle. Our comprehensive service offerings—one-stop calibration, repair, asset management, technology refresh, consulting, training and more—helps you improve product quality and lower costs.



Keysight Assurance Plans

[www.keysight.com/find/AssurancePlans](http://www.keysight.com/find/AssurancePlans)

Up to ten years of protection and no budgetary surprises to ensure your instruments are operating to specification, so you can rely on accurate measurements.

Keysight Channel Partners

[www.keysight.com/find/channelpartners](http://www.keysight.com/find/channelpartners)

Get the best of both worlds: Keysight's measurement expertise and product breadth, combined with channel partner convenience.

[www.keysight.com/find/USB3decode](http://www.keysight.com/find/USB3decode)

For more information on Keysight Technologies' products, applications or services, please contact your local Keysight office. The complete list is available at:  
[www.keysight.com/find/contactus](http://www.keysight.com/find/contactus)

### Americas

Canada	(877) 894 4414
Brazil	55 11 3351 7010
Mexico	001 800 254 2440
United States	(800) 829 4444

### Asia Pacific

Australia	1 800 629 485
China	800 810 0189
Hong Kong	800 938 693
India	1 800 11 2626
Japan	0120 (421) 345
Korea	080 769 0800
Malaysia	1 800 888 848
Singapore	1 800 375 8100
Taiwan	0800 047 866
Other AP Countries	(65) 6375 8100

### Europe & Middle East

Austria	0800 001122
Belgium	0800 58580
Finland	0800 523252
France	0805 980333
Germany	0800 6270999
Ireland	1800 832700
Israel	1 809 343051
Italy	800 599100
Luxembourg	+32 800 58580
Netherlands	0800 0233200
Russia	8800 5009286
Spain	800 000154
Sweden	0200 882255
Switzerland	0800 805353
	Opt. 1 (DE)
	Opt. 2 (FR)
	Opt. 3 (IT)
United Kingdom	0800 0260637

For other unlisted countries:  
[www.keysight.com/find/contactus](http://www.keysight.com/find/contactus)  
(BP-9-7-17)

DEKRA Certified  
ISO 9001 Quality Management System

[www.keysight.com/go/quality](http://www.keysight.com/go/quality)

Keysight Technologies, Inc.  
DEKRA Certified ISO 9001:2015  
Quality Management System



This information is subject to change without notice.  
© Keysight Technologies, 2017  
Published in USA, December 1, 2017  
5990-6002EN  
[www.keysight.com](http://www.keysight.com)